

VARIABLE REACH TRUCK ML1612R ML1812R






VARIABLE REACH TRUCK

MecliftTM ML1612R/ML1812R is a unique multipurpose machine. It is the only machine in the lifting capacity range of 16-18 tons, which can be operated inside containers.

It moves swiftly in confined spaces, such as warehouses and cargo vessels. In addition to heavy cargo lifting, ML1612R/ML1812R is perfect for practically any other material handling needs. Different kinds of Meclift attachments increase opportunities for using one machine for multiple purposes. It lifts 20-feet containers from fork pockets and stacks them up to 3-high. A hydraulically movable cabin ensures excellent visibility even when handling bulky objects. ML1612R/ML1812R is an environmentally friendly solution. Less work machinery on your yard means less fuel consumed. It also means more open space and better visibility, resulting in improved safety and less damage to your cargo. ML1612R/ML1812R is easy to transport in a 20-feet container or on a swap body vehicle. It is designed to operate reliably in demanding conditions. Supported by worldwide-known components and easily accessible spare parts, ML1612R/ML1812R is a secure choice.



MECLIFT™ ML1612R/ML1812R

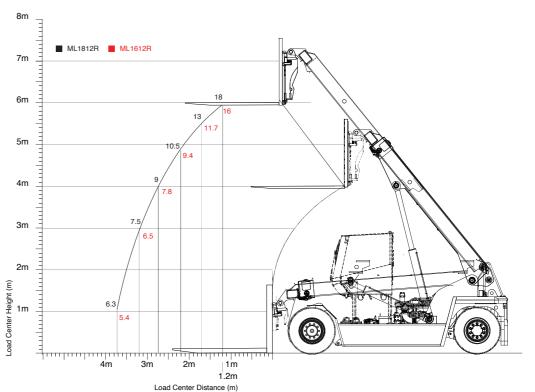







"We use two Meclift ML1612R machines for loading and unloading steel coils into and out of containers in our port. These machines are very unique in design. Thanks to their low height and good reaching ability we are able to use them in other jobs as well. Sometimes we wonder how some of these jobs could be done without the Meclift trucks."

Mr. Kazim Keskin

Port Operation Manager Borusan Lojistik Gemlik, Turkey "ML1812R is a thought-out concept, which features high-design-technology. Meclift is always looking for improvements. Inaddition to good service they are always.

Mr. René Kunst

Logistic & Transport Vehicle management Tata Steel, The Netherlands

"It makes specialized operations just so simple now"

Cezary Osipuk

DCT Gdansk S.A.

MECLIFT HANDLES
YOUR CARGO SAFELY

MECLIFTTM ML1612R/ML1812R

Manufacturer	Oy Meclift Ltd, Finland
Туре	ML1812R [ML1612R]
Standard colors	Orange (RAL2004) and
	Blue (RAL5002)

Lifting properties

Lifting capacity 18 000 kg [16 000kg] Load center 1,200 mm Lifting height 6,000 mm Reach 2 500 mm

Lifting speed Depends on boom position

Dimensions

Length (without attachments) 5 470 mm Width 2 160 mm Height (min) 2 265 mm Wheelbase 3 950 mm Ground clearance 150 mm

Weight (without attachments) 21 300 kg [20 800 kg]

Turning radius 5 250 mm

Standard forks W x H x L 200 x 100 x 1 800

Technical specifications	
Power source	Diesel engine
Manufacturer	Cummins
Model	QSB6,7 Stage III/Tier 3
	or Stage IV/Tier 4F
Power rating	ISO 2534 149@1900 kW@rpm
Peak torque	929@1500Nm@rpm
Transmission	3 speed automatic
Manufacturer	ZF
Model	Powershift ZF WG171
Driving speed	28 km/h
Drive avia	

Drive axle	
Manufacturer	Kessler
Model	D81
Service brake	Hydraulic wet disc
Parking brake	Spring powered disc
Tyres	
Front	4 x 12.00-20
Rear	2 x 12.00-20

- Lifting attachments, i.e. Coil Ram, Coil Clamps, Lifting Beams and Double Forks
- Other options available on request



Mecalift Oy

Ristinarkuntie 20 FI-33560 Tampere, Finland Tel. +358 400 403 593 sales@meclift.fi www.meclift.fi





