

Terberg KingLifter BV manufactures truck-mounted forklifts in a wide range of different models under the name KingLifter. The feature of these high quality machines is that all models boast an exceptionally good lifting capacity-low unladen weight ratio. Professional users will certainly appreciate how valuable this feature is.

The KingLifter S is the most compact machine in the Terberg KingLifter range. This Terberg KingLifter really comes into its own when restricted dimensions and a low unladen weight are key considerations.

Powerful for its size, the machine comes in several models. As standard, the machine features a 27 hp diesel engine, 1-wheel or 3-wheel drive, masts with a lifting capacity of 1,500 kg and a lifting height of 1,800 to 2,800 mm, fixed or retractable legs, a range of fork and wheel variants and many extra options.

In short, there is a Terberg KingLifter S model to suit your own specific application needs.

It is important for your company's image that a truck-mounted forklift retains its good looks. This also comes into play as far as residual value is concerned. Consequently, Terberg devoted particular attention to optimum anti-corrosion protection.

The frame, the lifting mast and other steel sections are finished with a CDP base layer and powder coating. The plating is made of stainless steel. The legs which are always susceptible to damage in use are hot-dip galvanised.

All models are equipped with work lights, beacon lamp, parking brake and power steering.



MODEL TKL-S

TECHNICAL INFORMATION



Model TKL-S


Area of application:

- Distributing beverages
- Agricultural sector and turf
- Building materials, e.g. transporting insulation materials
- Gas industry
- Carpet transport



The driver is seated completely within the contours of the machine to ensure operating safety.

The engine compartment is easily accessible thanks to the large revolving door. This makes it a lot easier to perform an oil level check and carry out service work.





Duplo Glide mast with Reach fork

- CDP base layer and powder coating
- Lifting capacity of 1,500 kg
- Lifting height of 1,800 to 2,800 mm



Distributing beverages

- Extra side-shift fork carriage
- Load backrest on fork carriage
- Crate support

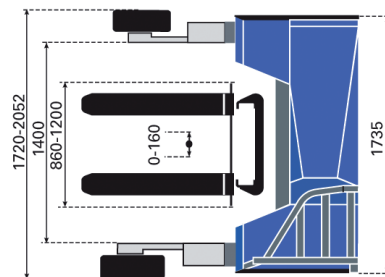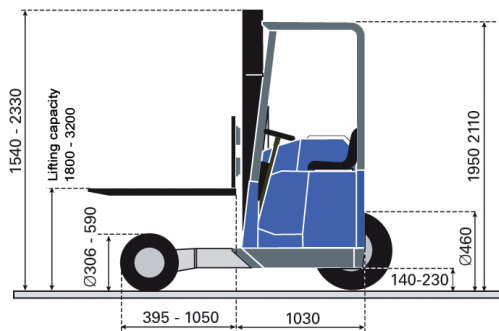

	TKL-S	
	1x3	3x3
lifting mast	DGR	DGR
engine	19.9 kW (27.1 hp)	19.9 kW (27.1 hp)
drive	1 wheel	3 wheel
lifting capacity	1,500 kg @ 600mm LC	1,500 kg @ 600mm LC
standard front wheel	140/55	18x7-8
standard rear wheel	23x8.5-12	23x8.5-12
unladen weight*	1,280 kg	1,480 kg

* varies according to machine specification