

Terberg KingLifter BV manufactures truck-mounted forklifts in a wide range of different models under the name KingLifter. The feature of these high quality machines is that all models boast an exceptionally good lifting capacity-low unladen weight ratio. Professional users will certainly appreciate how valuable this feature is.

The KingLifter MC model combines the best of the compact S model and the versatile M model. When manoeuvre space is limited, a powerful drive and a lifting capacity of 2,500 kg are required, the MC model is the right machine for the job.

There is an option of having a 31 or 38 hp direct injection diesel engine, 1-wheel or 3-wheel drive, 4-way steering, duplo glide mast or Terberg's patented duplo roller mast with a lifting capacity of 2,000 or 2,500 kg and featuring a lifting height of 2,200 to 4,050 mm, fixed or retractable legs, a range of fork and wheel variants and many extra options.

In short, there is a Terberg KingLifter model M to suit your own specific application needs.

It is important for your company's image that a truck-mounted forklift retains its good looks. This also comes into play as far as residual value is concerned. Consequently, Terberg devoted particular attention to optimum anti-corrosion protection.

The frame, the lifting mast and other steel sections are finished with a CDP base layer and powder coating. The plating is made of stainless steel. The legs which are always susceptible to damage in use are hot-dip galvanised. The legs of the 4-way machines are finished with a CDP base layers and powder coating.

All models are equipped with work lights, beacon lamp, parking brake and power steering.



# MODEL TKL-MC

TECHNICAL INFORMATION



## Model TKL-MC


Area of application:

- Agricultural sector
- Industry
- Building materials, e.g. transporting wood insulation materials, window frames and doors
- Gas industry
- Recycling

**King  
Lifter**

The driver is seated completely within the contours of the machine to ensure operating safety.

The engine compartment is easily accessible thanks to the large revolving door. This makes it a lot easier to perform an oil level check and carry out service work.



## Duplo Glide mast with Reachfork

- CDP base layer and powder coating
- Lifting capacity of 2,000 or 2,500 kg
- Lifting height of 2,200 to 4,050 mm





## Duplo Roller mast with scissor system

- Terberg patented
- Open view
- Lighter
- Faster

## 4-Way

- Advanced side loader
- Trouble-free manoeuvring in a small space
- Optimum power transmission
- Good terrain handling

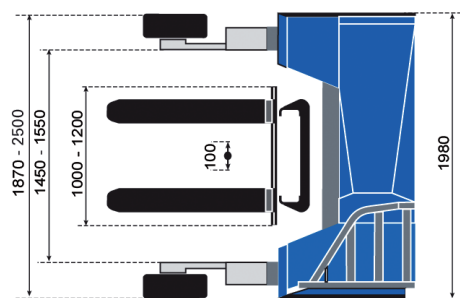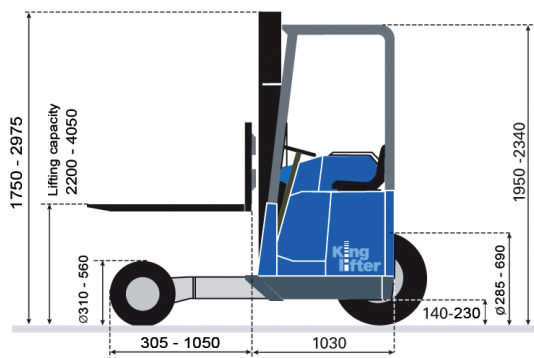

TKL-MC					
	1x3	3x3		3x3 4W	
lifting mast	DGR	DGR	DRS	DGR	DRS
engine	31 hp/38 hp	31 hp/38 hp	31 hp/38 hp	31 hp/38 hp	31 hp/38 hp
drive	1 wheel	3 wheel	3 wheel	3 wheel, 4-way	3 wheel, 4 way
lifting capacity	2,000 kg @ 600mm LC	2,000 kg @ 600mm LC	2,500 kg @ 600mm LC	2,000 kg @ 600mm LC	2,500 kg @ 600mm LC
standard front wheel	140/55	18x7-8	18x7-8	23x8.5-12	23x8.5-12
standard rear wheel	27x10-12	27x10-12	27x10-12	27x10-12	27x10-12
unladen weight*	1,620 kg	1,770 kg	2,090 kg	1,950 kg	2,270 kg

\* varies according to machine specification

**King Lifter** Terberg KingLifter B.V. | Baronieweg 23a | 3403 NL IJsselstein | The Netherlands  
Tel.: +31 (0)30 2219070 | Fax: +31 (0)30 2219071 | Email: [info@terbergkinglifter.eu](mailto:info@terbergkinglifter.eu)

Specifications and illustrations are subject to change; no rights may be derived from the illustrations and specifications provided.  
The specifications may be amended without prior notice.